

Drawing # S-0602-01-03

II Cable Technologies, Inc.

Bay 5, 5905 - 11 Street SE

Calgary, Canada

T2H 2A6


Tel: 403-571-8266

Fax: 403-571-8267

email: sales@micabletechnologies.com

Six Wire RTD Cable Design Specifications, Standard Sheath

Cable Diameter (D)	(inch)	0.118	0.125	0.177	0.188	0.236	0.250	0.313	0.375
	(mm)	3.0	3.2	4.5	4.8	6.0	6.4	8.0	9.5
Wire Diameter (W)	(inch)	0.014	0.015	0.021	0.022	0.028	0.030	0.037	0.045
	(mm)	0.36	0.38	0.53	0.56	0.71	0.76	0.94	1.14
Sheath Thickness (t)	(inch)	0.010	0.011	0.015	0.016	0.020	0.021	0.027	0.032
	(mm)	0.25	0.28	0.38	0.41	0.51	0.53	0.69	0.81
Bolt Circle Diameter (b)	(inch)	0.057	0.060	0.084	0.089	0.112	0.119	0.148	0.178
	(mm)	1.45	1.52	2.13	2.26	2.84	3.02	3.76	4.52
Coil Length	(feet)	1998	1781	888	787	500	445	284	198
	(m)	609	543	271	240	152	136	87	60
IR Test Voltage	VDC	500	500	500	500	500	500	500	500
Dielectric Test Voltage	VAC	500	500	500	500	750	750	750	750

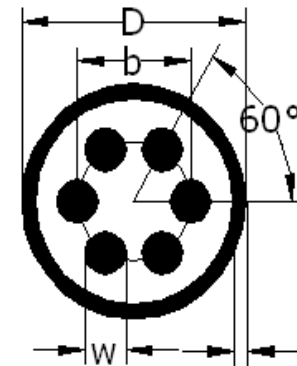

Cable dimensions shown are nominal. Actual dimensions may vary within tolerance limits. Specifications subject to change without notice.