

Drawing # S-0602-04-03

MI Cable Technologies, Inc.
 Bay 5, 5905 - 11 Street SE
 Calgary, Canada
 T2H 2A6


Tel: 403-571-8266

Fax: 403-571-8267

email: sales@micabletechnologies.com

Six Wire RTD Cable Design Specifications, Type Y Sheath

Cable Diameter (D)	(inch)	0.118	0.125	0.177	0.188	0.236	0.250	0.313	0.375
	(mm)	3.0	3.2	4.5	4.8	6.0	6.4	8.0	9.5
Wire Diameter (W)	(inch)	0.013	0.014	0.020	0.021	0.026	0.028	0.035	0.042
	(mm)	0.33	0.36	0.51	0.53	0.66	0.71	0.89	1.07
Sheath Thickness (t)	(inch)	0.014	0.015	0.020	0.022	0.027	0.029	0.036	0.043
	(mm)	0.36	0.38	0.51	0.56	0.69	0.74	0.91	1.09
Bolt Circle Diameter (b)	(inch)	0.053	0.056	0.078	0.083	0.104	0.111	0.139	0.166
	(mm)	1.35	1.42	1.98	2.11	2.64	2.82	3.53	4.22
Coil Length	(feet)	2246	2002	885	750	562	500	319	222
	(m)	685	610	270	229	171	152	97	68
IR Test Voltage	VDC	500	500	500	500	500	500	500	500
Dielectric Test Voltage	VAC	500	500	500	500	750	750	750	750

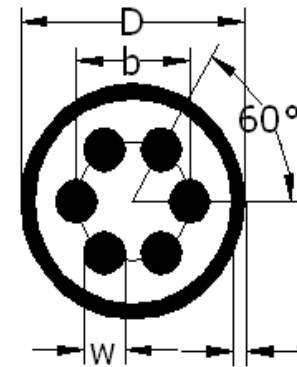

*Cable dimensions shown are nominal. Actual dimensions may vary within tolerance limits.
 Specifications subject to change without notice.*